Dino-Lite Europe - Phone: - Email:

# WF4515ZT - Wireless

Marke: Dino-Lite


**Artikelnummer:** WF4515ZT

### **Short Description**

1.3 Megapixel Edge sensor20-220x magnificationAdjustable polarizerFlexible LED Control (FLC)Automatic Magnification Reading (AMR)

### **Beschreibung**

The Dino-Lite WF4515ZT is a Wireless model that is part of the Universal series. Go from wireless to wired and back in an instant. Work wired via USB or work wireless with the attachable WF-20 Wireless adapter.

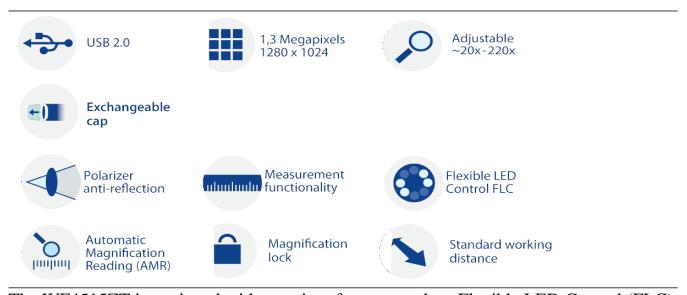

The WF4515ZT is equipped with premium features such as Flexible LED Control (FLC), integrated polarizer, extensive measurement functionality and Automatic Magnification Reading (AMR) for measurement-intensive applications.

#### The main features of the WF4515ZT are:

- Completely wireless solution (including WF20)
- 20-220x magnification
- 1.3 Megapixel Edge sensor

- Automatic Magnification Reading (AMR)
- Adjustable polarizer
- Flexible LED Control (FLC)
- And more...

Working distance/	field of view/	depth of field:
-------------------	----------------	-----------------

MAGNIFICATI	WORKING	FIELD OF	FIELD OF	DEPTH OF
	DISTANCE *		VIEW(Y)	FIELD
Listed values	* Without front		V12 ((1)	Unit = mm
may differ	cap			
slightly	cup			
Siigiivij				
20	60.2	19.5	14.6	2.5
30	33.5	13.0	9.7	1.8
40	20.9	9.8	7.3	1.5
50	13.9	7.8	5.8	-
60	9.7	6.5	4.8	-
70	7.1	5.6	4.2	1.0
80	5.5	4.9	3.6	-
90	4.5	4.3	3.2	-
100	4.1	3.9	2.9	-
110	4.0	3.6	2.7	-
120	4.1	3.3	2.4	-
130	4.5	3.0	2.2	-
140	5.0	2.8	2.1	-
150	5.6	2.6	1.9	-
160	6.3	2.4	1.8	-
170	7.1	2.3	1.7	-
180	8.0	2.2	1.6	-
190	8.9	2.1	1.5	-
200	9.9	2.0	1.5	-
210	10.9	1.9	1.4	-
220	11.9	1.8	1.3	0.1

## Spezifikation

Lighting			
Light/ LED type	White		

NY 1 CYED	0
Number of LEDs	8
LED on/off switchable:	Yes
Infrared filter	IR cut-filter >650 nm
Diffuser available	Yes (N3C-D included)
Emission filter	No
Polarizer	Yes, linear
Optics	
Magnification	20-220x
Macro zoom	No
Working distance	Standard
Lens type	Glass with anti-reflection coating
Sensor	
Sensor type	CMOS
Resolution	1.3 Megapixel (1280x1024)
Maximum frame rate	30 fps
Compatibility	
Interface	USB 2.0
Operating system	Windows 7, 8, 10 & 11, MacOS 10.11.6 and up
Included software	DinoCapture 2.0 (Windows), DinoXcope (Mac
	OS)
Supported image formats	BMP, GIF, PNG, JPG, TIF, RAS, PNM, TGA,
(Windows)	PCX, MNG, WBMP, JP2, JPC, PGX
Supported video formats	WMV, FLV, SWF
(Windows)	
Supported image formats	JPEG, PNG
(MacOS)	
Supported video formats	MOV
(MacOS)	
Imaging standards	DirectShow, UVC
Wifi	Yes
Housing	
Housing material	Composite/ plastic housing
Dimensions	11.4cm (L) x 3.3cm (D)
Weight	111g
Cable length	1.8m
Features	'
Special feature	Automatic Magnification Reading (AMR),
1	Flexible LED Control (FLC)
Measurement	Yes
Calibration	Yes
Microtouch sensor	Yes
ESD safe	No

Information	
Package contents	Microscope, WF-20, carry pouch, software CD, calibration target, user manual, N3C-O- Open cap, N3C-C- Closed cap, N3C-D- diffuser cap, N3C-E-Extension cap, N3C-L- Long cap, N3C-S- Side light cap
Warranty information	2 years European warranty
Regulatory approval	CE, FCC, ROHS
Price range	€900,00 - €1100,00

# **Product Gallery**