



KAHLES

K328i REFINED ENHANCED VERSATILITY.



3.5-28x50i

The ultimate all-rounder, combining reliability and compact versatility in any situation with an unmatched and extensive field of view.

PRODUCT HIGHLIGHTS

- ◆ Ergonomic, shooter-specific configurations for optimal control.
- ◆ True 8x zoom with uncompromised optical performance across the entire adjustment range.
- ◆ VISIONFLEX – Revolutionary optical design with a **40%** wider field of view* and a remarkably generous eyepiece.

FEATURES



First
focal plane



Illuminated
reticle



36 mm
Main tube
diameter 36 mm



10 MIL
10 MIL per
revolution turrets



Adjustment
direction CCW



Top mounted
parallax



Windage
left or right



EASYREAD



REVOLUTION
INDICATOR




ZERO STOP



TWISTGUARD




VISIONFLEX

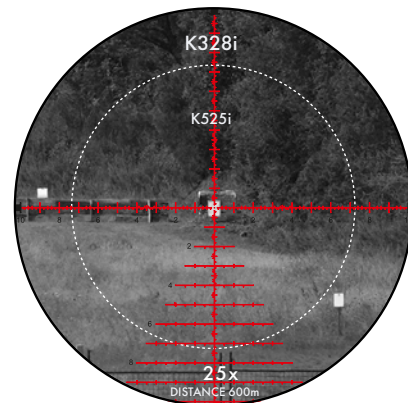


* Based on the comparison to K525i (2025) at 25x.

RETICLES



SKMR+



SKMR4+

SCAN TO EXPLORE
OUR PORTFOLIO.



**KAHLES**

K328i REFINED TECHNICAL DATA

Focal plane	FFP
Magnification	3,5-28
Objective lens diameter (mm)	50
Field of view (ft/100 yds)	42.9-5.4
Exit pupil diameter (mm)	7.5-1.8
Eye relief (mm)	3.62
Diopter compensation (dpt)	+2/-3
Twilight factor (DIN 58388)	13.2-37.4
Parallax adjustment (m)	20 - ∞
Impact correction / Click E/W	.1 MRAD
Clicks / Revolution E/W	100/100
Adjustment range E/W (MIL)	34/13
Adjustment range E/W (in/100 yds)	126/46.8
Adjustment range E/W (MOA)	114.75/43.9
Adjustment direction	CCW
Windage	left/right
Maintube diameter (mm)	36
Length (in)	14.2
Weight (oz)	37.0
Battery type	CR2032
Objective filter thread	M52 x 0.75
Reticles	SKMR4+ SKMR+
Illumination	
VISIONFLEX	
EASYREAD	
ZEROSTOP	
TWISTGUARD	
Waterproof (ISO9022-8)	
Accessories (optional)	Flip-Up Cover Objective 50 mm / Ocular 52 mm, Sunshield 50 mm, Killflash ARD 50 mm, Parallax Spinner K-1, Throw Lever K-1, Bubble Level 36 mm

SCAN FOR PRICES,
USER MANUAL &
SERVICE SECTION.

